

70mm DC FAN
CE RS
● General Specifications

- ⌚ Material ----- Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- ⌚ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⌚ Life time -----25000 Hours Sleeve bearing
50000 Hours Ball bearing
- ⌚ Storage Temperatur--- -30℃ ~ +70℃ (Non-condensing)
- ⌚ Bearing Type----- Ball Bearings Sleeve
- ⌚ Speed Range----- ±10%
- ⌚ Part Numbering System

 SFD-FB0712LB- **B R 1**

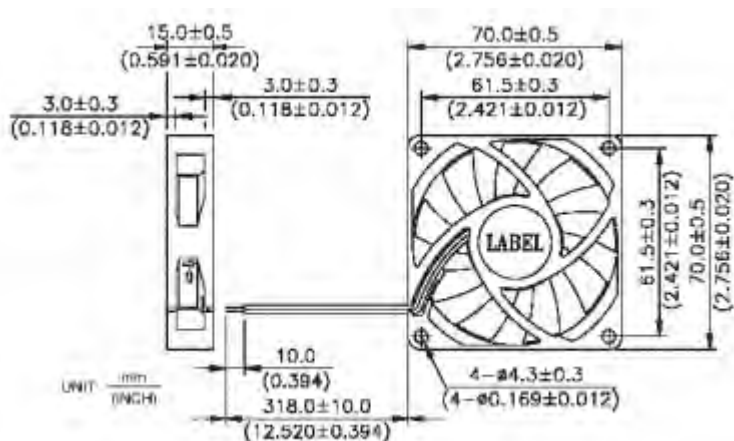
Waterproof level:0=no,1=IP55,2=IP68

Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor

Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing,L=long life bearing


70 X 70 X 15mm (Mass: 45g)

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt		R.P.M	M3/min	CFM	MmH2O	
SFD-FB0705LB	5	4.5~5.5	0.18	0.9	2800	0.661	23.36	2.26	0.088	26.5
SFD-FB0705MB			0.24	1.2	3400	0.797	28.17	3.11	0.122	31.5
SFD-FB0705HB			0.38	1.9	3900	0.930	33.19	4.11	0.161	35.0
SFD-FB0712LB	12	7.5~13.2	0.09	1.08	2800	0.661	23.36	2.26	0.088	26.5
SFD-FB0712MB			0.16	1.92	3400	0.797	28.17	3.11	0.122	31.5
SFD-FB0712HB			0.21	2.52	3900	0.930	33.19	4.11	0.161	35.0
SFD-FB0712HHB			0.28	3.36	4400	1.062	37.52	5.31	0.208	39.0
SFD-FB0712VHB			0.39	4.68	5400	1.286	45.41	7.76	0.304	45.5
SFD-FB0724LB	24	14.5~27.5	0.07	1.68	2800	0.661	23.36	2.26	0.088	26.5
SFD-FB0724MB			0.10	2.4	3400	0.797	28.17	3.11	0.122	31.5
SFD-FB0724HB			0.14	3.36	3900	0.930	33.19	4.11	0.161	35.0
SFD-FB0724HHB			0.17	4.08	4400	1.062	37.52	5.31	0.208	39.0

● Dimensions(unit:mm/inch)

● Air Flow-Static Pressure Characteristics
